


### Product Image



### Product Dimensions

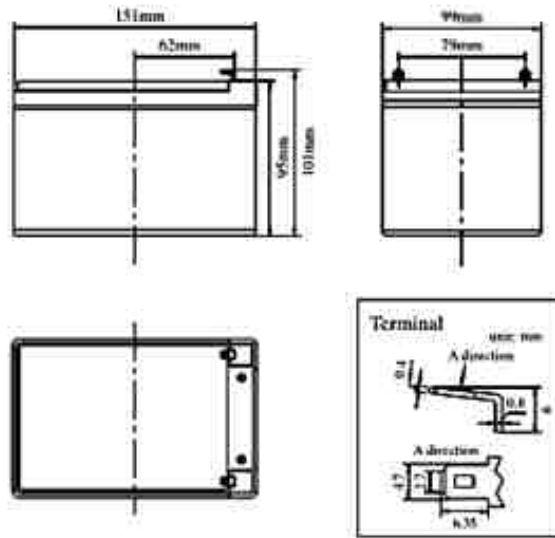

### Characteristics

Nominal Voltage		12V
Nominal Capacity (20 hour rate)		14Ah
Capacity 25°C(77°F)	10 hour rate (1.26A)	12.6Ah
	5 hour rate (2.4A)	12Ah
	1 hour rate (8.5A)	8.5Ah
Cranking Amps	-18°C (0°F)	180cca
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C(77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 3.6A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 3.6A Voltage 14.4-14.9V

### Packaging

Battery Dimensions	Length	152mm
	Width	99mm
	Height	96mm
	Total Height	102mm
Box Dimensions	Length	325mm
	Width	218mm
	Height	141mm
Quantity Per Box		4 PCs per box
Net weight Per Cell		3.8 kg±3%
Net weight Per Box		15.2kg
Gross Weight		15.6kg

#### Discharge Constant Current per Cell (Amperes at 77°F/25°C)







F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	46.2	30.8	23.2	15.4	10.8	8.5	5.2	4.0	2.5	1.8	1.39	0.77
1.65V	45.4	30.2	22.8	15.1	10.6	8.3	5.1	3.9	2.4	1.7	1.36	0.76
1.70V	44.5	29.7	22.3	14.8	10.4	8.2	5.0	3.8	2.4	1.7	1.34	0.74
1.75V	43.7	29.1	21.9	14.6	10.2	8.0	5.0	3.7	2.3	1.7	1.31	0.73
1.80V	42.0	28.0	21.1	14.0	9.8	7.7	4.8	3.6	2.2	1.6	1.26	0.70

#### Discharge Constant Power per Cell (Watts at 77°F/25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	88.9	59.3	44.6	29.6	20.8	16.3	10.1	7.6	4.8	3.4	2.7	1.5
1.65V	87.3	58.2	43.8	29.1	20.4	16.0	9.9	7.5	4.7	3.4	2.6	1.5
1.70V	85.7	57.1	43.0	28.6	20.0	15.7	9.7	7.3	4.6	3.3	2.6	1.4
1.75V	84.1	56.1	42.2	28.0	19.6	15.4	9.5	7.2	4.5	3.2	2.5	1.4
1.80V	80.9	53.9	40.6	27.0	18.9	14.8	9.2	6.9	4.4	3.1	2.4	1.3

**Note** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **MCA** for the latest information.

## Performance Characteristics

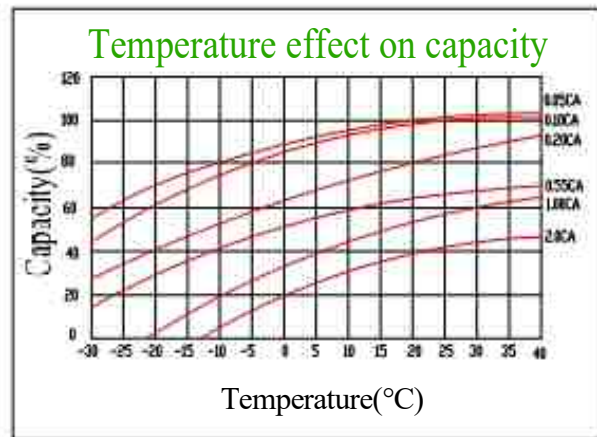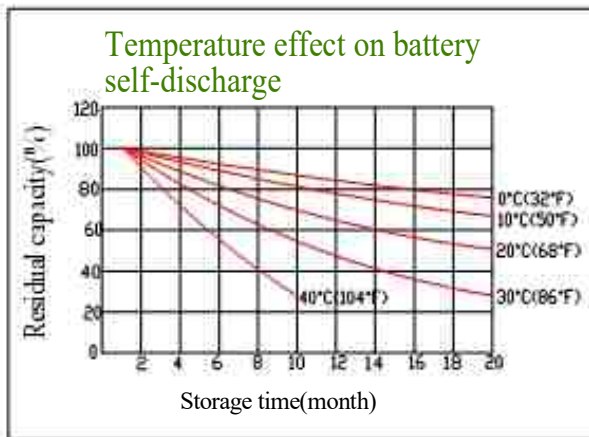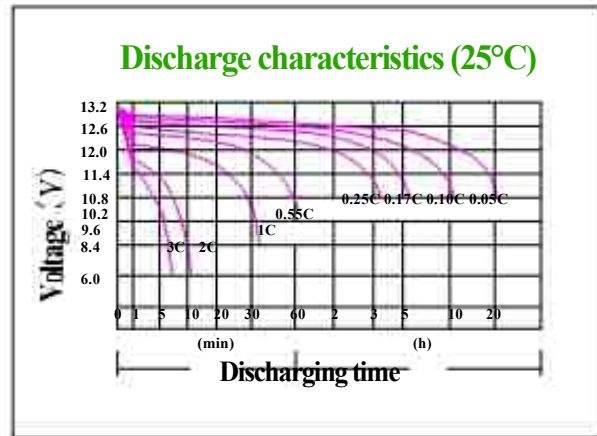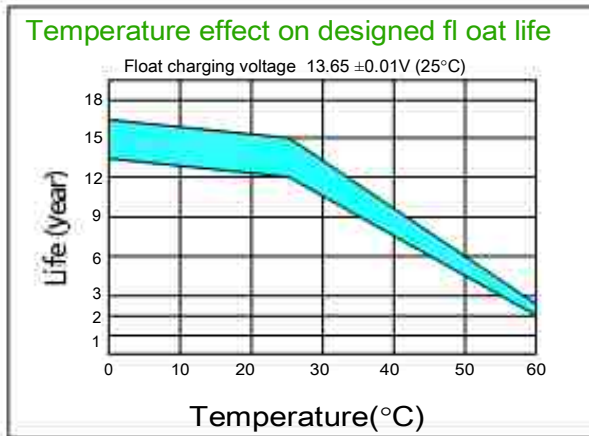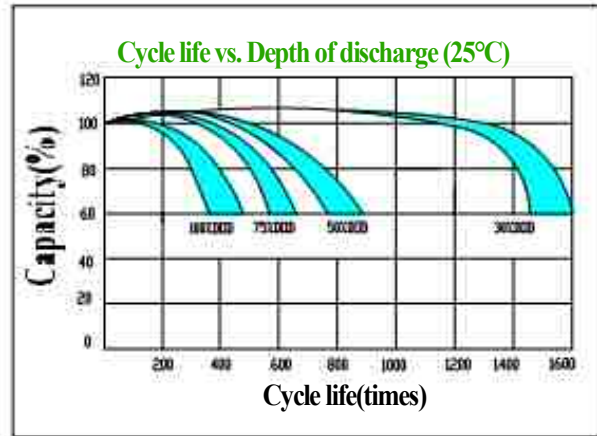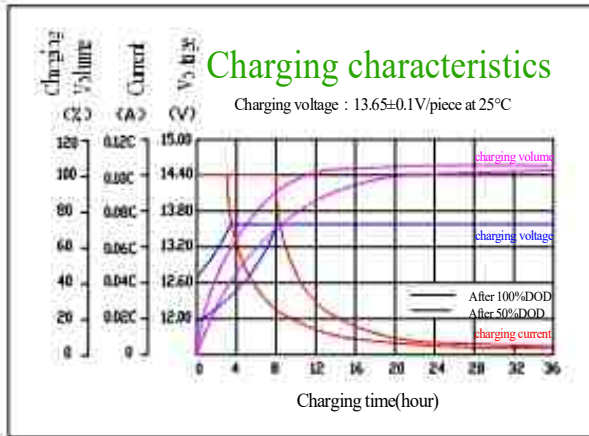

## Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid